
## Snap Gravel Stop HD

Part number3

ANSI/SPRI ES-1 CERTIFIED:

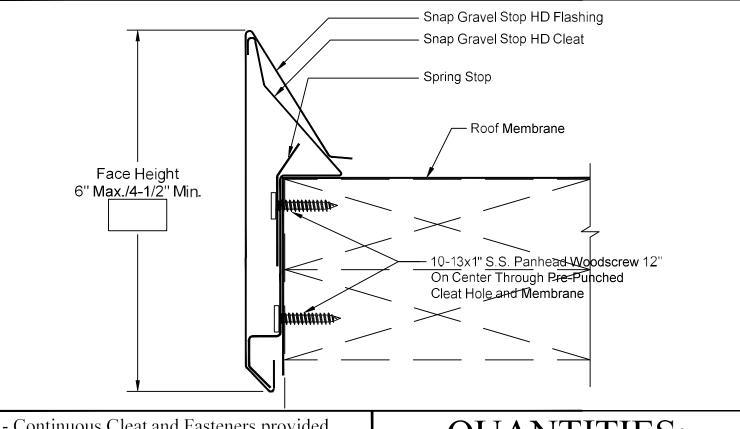

~ ·	$\alpha_1$		• 1	1
- Continuous	Cleat and	Hasteners	nrovio	ec
Continuous	Cicat and	1 astericis	provid	Cu

- Concealed Splice Plates provided.
- Continuous Cleat: 22GA 20GA

## PRINT APPROVA

Architect and/or Contractor shall verify all dimensions, sizes, and quantities, All products to be installed in strict accordance with Jackson Architectural Metals printed instructions.

Approved By:

## **QUANTITIES:**

Lineal Feet (10'-0" Lengths\*):

Emedia ect (10 0 Eenguis	) <u>.</u>
Outside Miters**:	Optional Welded (Surcharge Applies)
Inside Miters**:	Optional Welded (Surcharge Applies)
Right End Caps**:	Optional Welded (Surcharge Applies)
Left End Caps**:	Optional Welded (Surcharge Applies)
Splice Plate Tape Sealant:	Optional Sealant (Surcharge Applies)
* Optional lengths availa	able up to 20'-0"
** Standard riveted	1

PR	O1	EC	$\mathbf{T}$
TTZ	ΟJ	$\Gamma$	1.

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE:



Jackson Architectural Metals, LLC 1421 S. Cooper St Jackson, MI 49203

Phone: (517)782-8884/ Fax: (517) 782-8906

www.jacksonamf.com

$\mathbf{M}_{A}$	<b>4</b> Τ	ΈR	IA	$\mathbf{I}_{\lambda}$
T 4 T T		-		_

24GA .040" AL

Other:\_\_\_\_ .050" AL

Finish: \_\_\_\_\_

Color:

Carlisle

Firestone Other