


# Gravel Stop & Cleat

Part number 11

ANSI/SPRI ES-1 CERTIFIED:

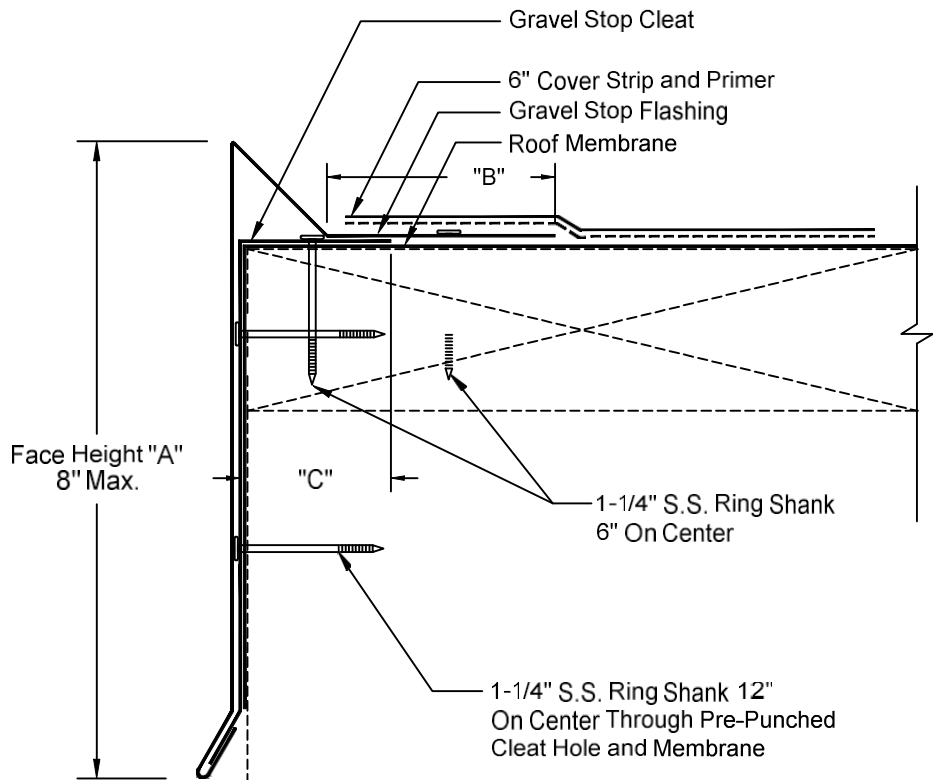

"A" =   
Face Height

"B" =   
Gravel Stop Flange

"C" =   
Cleat Flange

- Continuous Cleat and Fasteners provided.
- Concealed Splice Plates provided.
- Continuous Cleat:  22GA  20GA

## PRINT APPROVAL:

Architect and/or Contractor shall verify all dimensions, sizes, and quantities, All products to be installed in strict accordance with Jackson Architectural Metals printed instructions.

Approved By: \_\_\_\_\_

Date: \_\_\_\_\_

## QUANTITIES:

Lineal Feet (10'-0" Lengths\*): \_\_\_\_\_

Outside Miters\*\* : \_\_\_\_\_  Optional Welded (Surcharge Applies)

Inside Miters\*\* : \_\_\_\_\_  Optional Welded (Surcharge Applies)

Right End Caps\*\* : \_\_\_\_\_  Optional Welded (Surcharge Applies)

Left End Caps\*\* : \_\_\_\_\_  Optional Welded (Surcharge Applies)

Splice Plate Tape Sealant:  Optional Sealant (Surcharge Applies)

\* Optional lengths available up to 20'-0"

\*\* Standard riveted

PROJECT: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_

ROOFING CONTRACTOR: \_\_\_\_\_

REPRESENTATIVE: \_\_\_\_\_

## MATERIAL:

24GA  .040" AL

Other: \_\_\_\_\_  .050" AL

Finish: \_\_\_\_\_

Color: \_\_\_\_\_

Carlisle

Firestone

Other



Jackson Architectural Metals, LLC  
1421 S. Cooper St Jackson, MI 49203  
Phone: (517)782-8884/ Fax: (517) 782-8906  
www.jacksonamf.com

TECHNICAL DATA BULLETIN

&

INSTALLATION GUIDE

FOR

JAMF GRAVEL STOP SYSTEM

WERE UNAVAILABLE AT TIME OF PRODUCTION

PLEASE CONTACT OUR OFFICE AND WE WILL SHIP

INSERTS TO YOU AS SOON AS THEY ARE READY

THANK YOU

JACKSON ARCHITECTURAL METAL FABRICATORS, LLC

(517) 782-8884

LORI@JACKSONAMF.COM