



1421 S. Cooper St, Jackson, MI 49203
Phone: (517) 782-8884
Fax: (517) 782-8906
info@jacksonamf.com
www.jacksonamf.com

JA-1.75 SL Profile

The JA-1.75SL is distinctive for its broad width seam, impressive structural capabilities and easy Snap Lock installation. Featuring a 1-3/4" seam height, this continuous interlocking engineered roof system has a concealed fastener and clip application that allows thermal movement and requires no mechanical seaming to ensure weather tight integrity. The installation is simple and quick, yet it withstands extremely high design pressures and is approved for use on Weather Tightness Warranty projects.



*Weather
Tightness
Warranty
Approved!*

Ideal Application:

Residential

Institutional

Structural

Testing:

In accordance with:




- UL 580 Wind Uplift (Class 90)
- TAS 125 Wind Uplift
- UL 1897 Extended Phase Wind Uplift
- UL 2218 Class 4 Hail Impact
- UL 790 Class A Fire Rating
- UL Environmental – SRI Third Party Verified
- ASTM E1646 Water Infiltration
- TAS 100 Wind Driven Rain
- ASTM E1680 Air Infiltration
- ASTM E1886 Missile Impact
- Miami-Dade County Approved
- Florida Building Code Approved
- Texas Department of Insurance Approval



1421 S. Cooper St, Jackson, MI 49203
 Phone: (517) 782-8884
 Fax: (517) 782-8906
info@jacksonamf.com
www.jacksonamf.com

JA-1.75 SL Profile

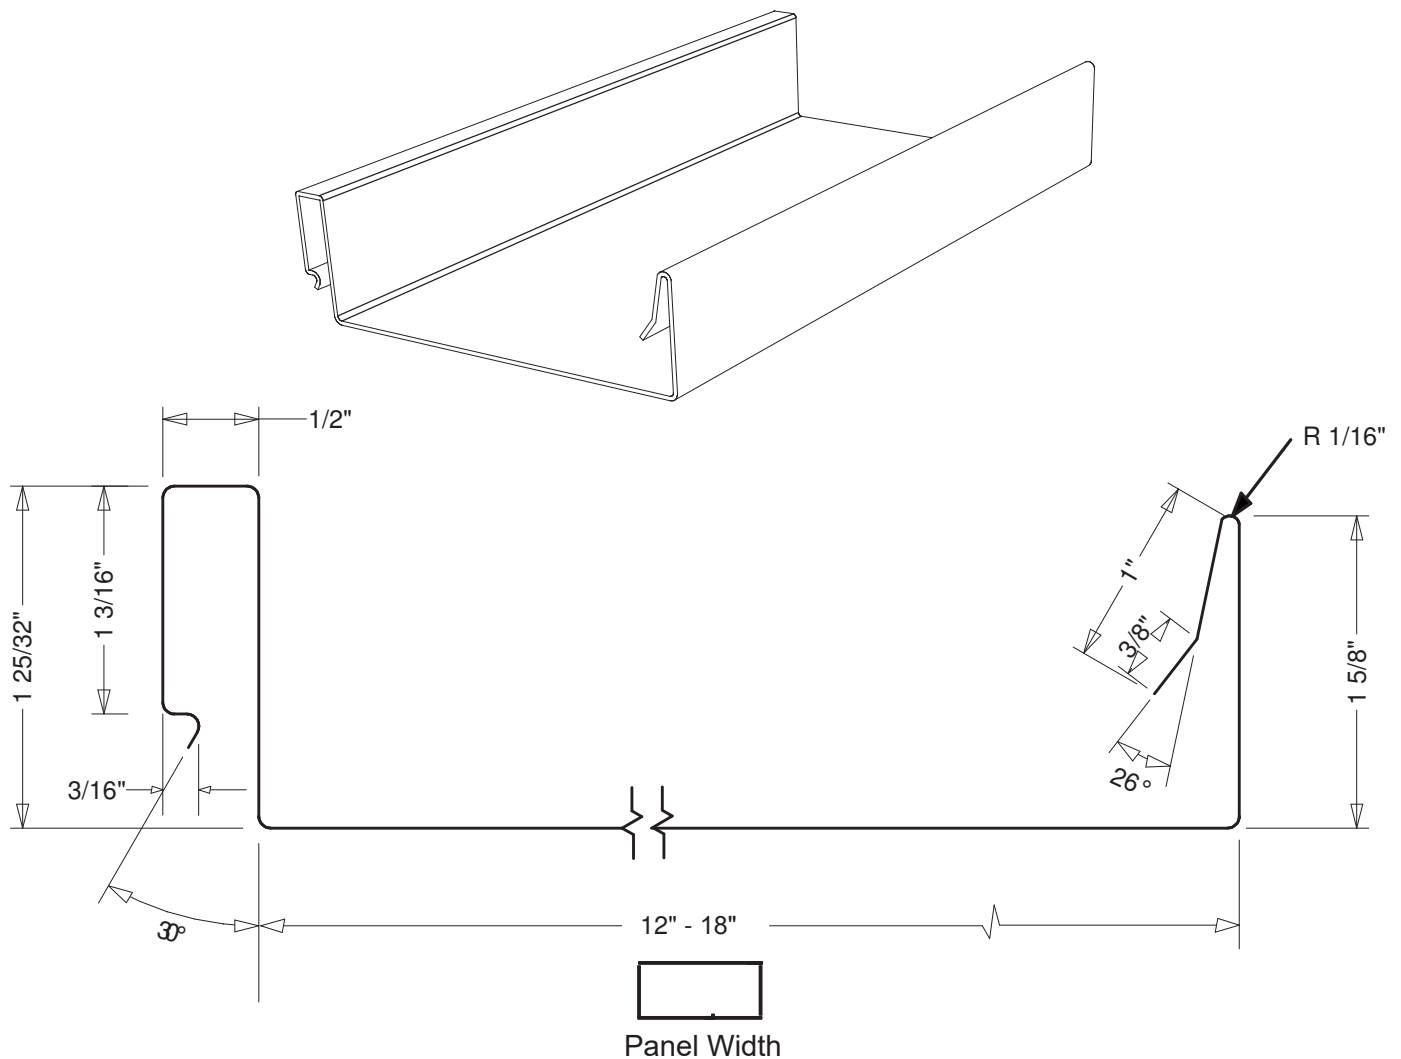

JACKSON ARCHITECTURAL METAL FABRICATORS, LLC

Job Name/Purchase Order No.	Material:	"x"	Striation	Panel Bead	Color	Manufacturer:	"x"
	26 ga SMP					Carlisle	
	26 ga Kynar					CMG	
	26 ga Galvalume					Drexel	
	24 ga Kynar					East Lake Metals	
	24 ga Galvalume					Firestone	
	22 ga Kynar						
	26 ga Textured						

STANDING SEAM ORDER FORM



DATE: _____

Purchase Order NO. _____

Panel Type:

JA-1.5NF ☐

JA-1.5SL ☐

JA-1.5 ME ☐

JA-1.75SL ☐

JA-2.0 ME ☐

Striations: Yes No

Panel Width: _____

Roof Pitch: _____

Color: _____

Panel Quantity @ Panel Length Panel Quantity @ Panel Length Panel Quantity @ Panel Length

@	@	@
@	@	@
@	@	@
@	@	@
@	@	@
@	@	@
@	@	@
@	@	@
@	@	@
@	@	@
@	@	@
@	@	@
@	@	@

Trims: QUANTITY IN 10' LENGTH SEGMENTS

2" Drip Edge: _____

3.5" Rake Edge: _____

Ridge Cap: _____

Vented Ridge Cap: _____

HeadWall Flashing: _____

SideWall Flashing: _____

Valley & Cleat _____

Z Channel: _____

Vented Z Channel: _____

Joggle Cleat: _____

Boots: _____

Notes:
